EXHIBIT 9
DATE 2/8/05
HB 484

IOWA VETERINARY SUPPLY CO.

Iowa Falls, IA 1-800-392-5636 | Mankato, MN 1-800-533-0340 | Mauston, WI 1-888-860-1146 | Sioux City, IA 1-800-831-4828

Eric' Some of the Custom Codes may Need to be updated so the total price may not be Exact. Also this is ~~E~~ Featherlites full Retail. I can work on this when we get Closer.

Thanks

Bill

case*study*

First in the nation: Mobile meat processing unit receives USDA grant of inspection

Farmers expect doubling, tripling of net revenues with new Featherlite trailer and its technology.

SAN JUAN COUNTY, Washington -August 2002 - A custom-built mobile meat processing unit - the first of its kind in the United States - has won United States Department of Agriculture (USDA) grant of inspection. The grant of inspection commits the USDA to providing federal inspection for on-farm processing of livestock. And with USDA approval, livestock producers in four northwest Washington counties will be able to sell beef, pork, lamb and possibly bison to grocery stores, restaurants and other local consumers.

Consisting of a trailer custom designed and built by one of the nation's leading trailer manufacturers, Featherlite, Inc. (www.fthr.com), and a truck, the unit will be accompanied by a USDA inspector as it travels to the farms of Island Grown Farmers Co-op members to slaughter livestock. The locally raised meat may then be stamped as USDA inspected and passed.

"The unit is the result of several years of patience and hard work on the part of local livestock producers, Washington State University Cooperative Extension, Lopez Community Land Trust (LCLT) staff, numerous supporters, and Featherlite," says *Sandy Wood, LCLT executive director.* "This new unit will provide farmers with the option of selling their meat direct, adding value to their operations by capturing a larger share of the retail price of meat."

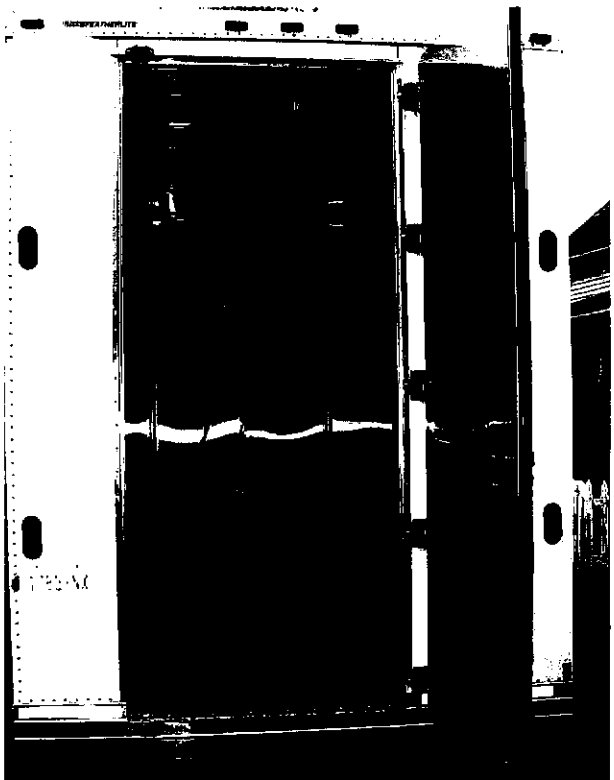

"By selling direct, you may not receive the full retail value, but you'll be getting substantially more than if you take your animals to auction," says Lopez farmer *Bruce Dunlop,* who served as project manager to LCLT for development of the Mobile Unit. "In fact, a livestock producer will be able to double or triple the net revenue from each animal processed by the Mobile Unit."

The 26-foot Featherlite trailer was built to meet USDA regulations for a meat processing facility. All surfaces are stainless steel and the cooler compartment was engineered to accommodate the hanging of 6,000 pounds of meat. "Featherlite was instrumental in getting the mobile meat processing unit built, from the conception, to the designing and manufacturing of the unit. Their engineers worked closely with LCLT and our other vendors to incorporate our requests. The quality of construction and the finish of the trailer is second to none," says Dunlop.

Now that the USDA Grant of Inspection has been received and trial slaughtering held, the Mobile Unit is undergoing several months of testing and commissioning. By Spring 2002 the Island Grown Farmers Co-op and the Mobile Unit will be ready to offer full services to area livestock producers.

For more information on Featherlite mobile meat processing trailers, [redacted]

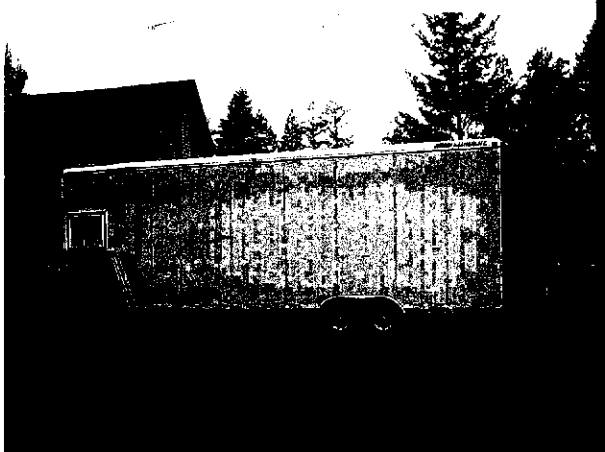

FEATHERLITE TRAILERS

FOR MORE INFORMATION
VISIT US ON THE WEB:
www.fthr.com
OR EMAIL US:
salesinfo@fthr.com

FEATHERLITE, INC. • P.O. Box 320 • Hwy 63 & 9 • Cresco, IA 52136 • 800-800-1230

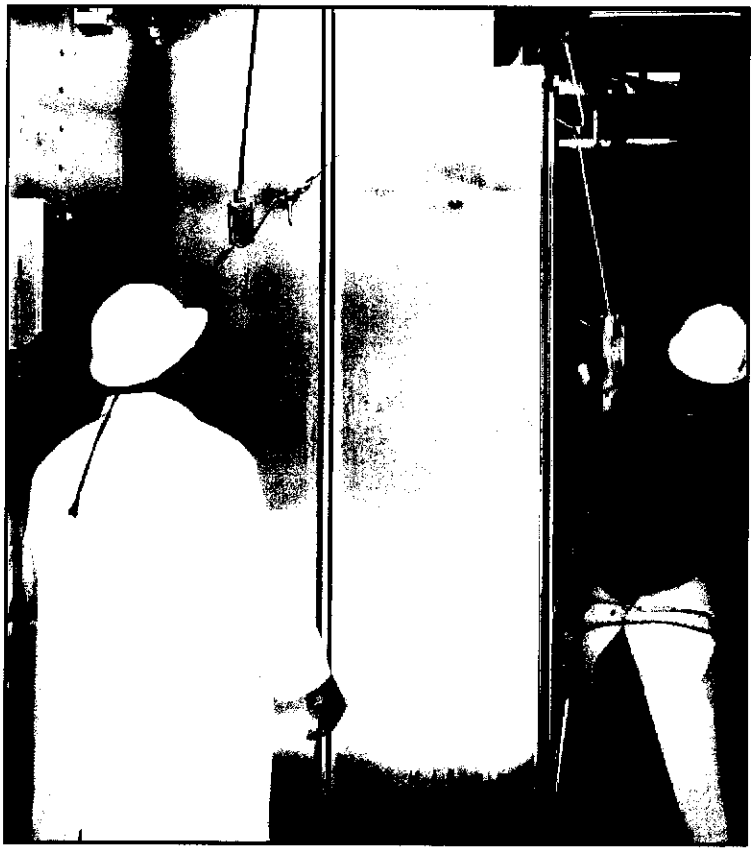

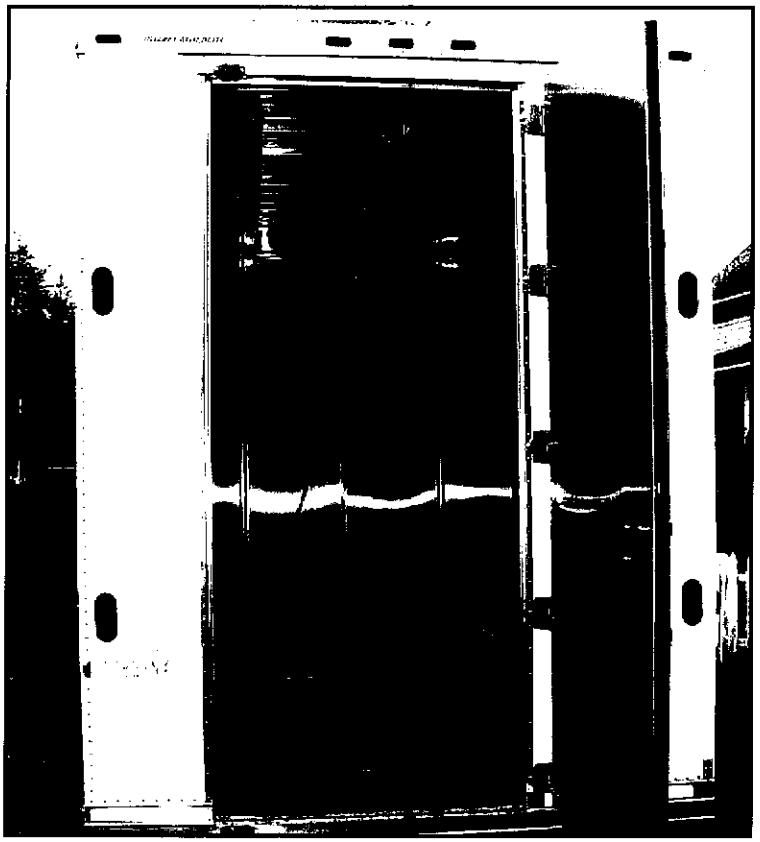

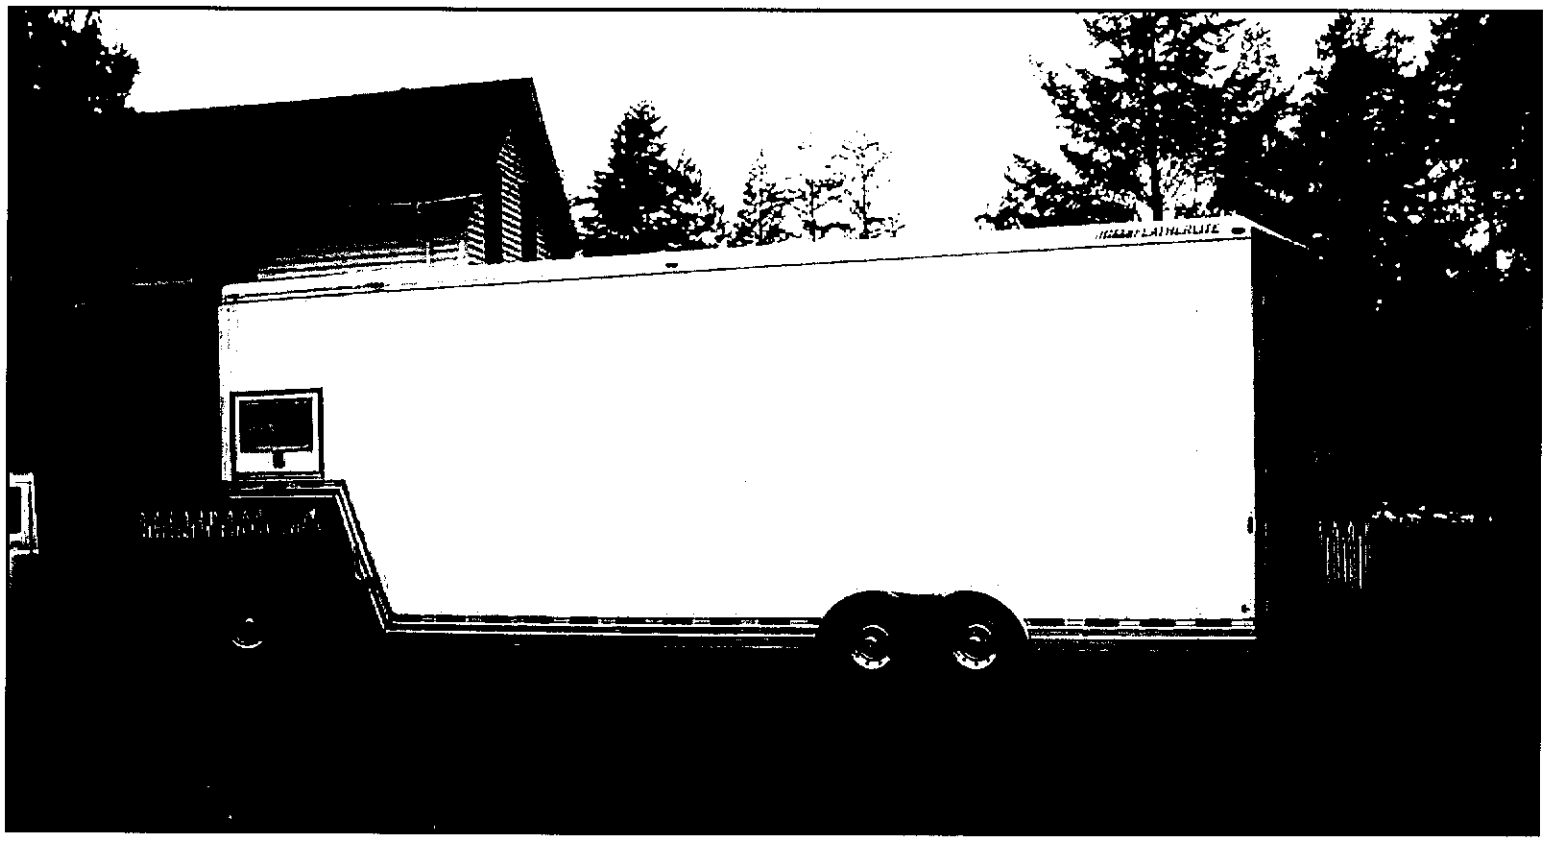

FEATHERLITE TRAILERS

FOR MORE INFORMATION
VISIT US ON THE WEB:
www.fthr.com
OR EMAIL US:
salesinfo@fthr.com

FEATHERLITE, INC. • P.O. Box 320 • Hwy 63 & 9 • Cresco, IA 52136 • 800-800-1230

Featherlite Inc.

Quote: 5473
Printed: 1/12/2005

Quote Prepared For

Mobile Meat Processing Unit

Featherlite Customer Service

Featherlite, Inc.
P.O. Box 320
Hwy. 63 & 9
Cresco IA 52136

Bus. 563-547-6000
800 800-800-1230
Fax 563-547-6100

Internet Web www.featherliteinc.com

Bill To Dealer

010086
Featherlite, Inc.
13380 US Hwy 63
PO Box 320
Cresco, IA 52136

Bus. (563)547-6000
800 (800)800-1230
Fax (563)547-6090

Email

Ship To Dealer

010086
Featherlite, Inc.
13380 US Hwy 63
PO Box 320
Cresco, IA 52136

Bus. (563)547-6000
800 (800)800-1230
Fax (563)547-6090

Email

Sales Person Dawn Mackenburg

Thank-you for your business.

Bus. (563)547-6000 x1069
800 (800)800-1230 x1069
Fax (563)547-6100

Entered 01/12/2005 **ShipVIA**
Revised 01/12/2005 **FOB**
Est.Comp **Terms**
Quote Valid for 25 **Days**
Website http://www.featherliteinc.com

Email: dmackenburg@fthr.com

Qty	Trailer No.	Description	Revised Length	Revised Width	Revised Height	Price Each	ItemTotal
1	1530-8026	1530 DRY FREIGHT	26	8.5	11.5	68,788.00	68,788.00

Part No.	Description	Qty	U/M	Price Per	Extended	Action Code
15308026B	1530 8'0" X 26' X 6'10" BASE MOBILE PROCESSING UNIT TRAILER. 11' 6" TALL INSIDE. SIMILAR TO 2C048359.	1	EA			
1938	AXL 7K RUB TOR W/ELEC BRAKE REPLACED	2	EA			
1987	AXL 102" W	1	EA			
5000	CONSPICUITY TAPE	1	EA			
5545	TIRE LT235/85R16 10PLY RATED RAD	5	EA			* Replaced
8075	CARRIER SPARE TIRE	1	EA			
5227	COVER HUB ABS 8-BOLT W/DOMED LOGO	4	EA			
5248	WHL 16" 8H MOD STL SIL	5	EA			* Replaced
8020	COUPLER 2 5/16" ADJ (GN)	1	EA			
8014	LANDING GEAR SNGL SPEED REPLACED	1	EA			
7400	LIGHT CLEARANCE	14	EA			
7404	LIGHT STOP/TURN	2	EA			

Continued...

8156	FLOOR 2" TONGUE & GROOVE TRTD PINE REPLACED	26	EA			
3386	DOOR REAR FULL SWING W/SINGLE CAM REPLACED	1	EA			
3476	DOOR CAMPER DELUXE 32" X 74" W/O WDW, W/DEADBOLT & SCREEN	1	EA			* Replaced
7301	SWITCH BREAKAWAY W/BATTERY	1	EA			
3954	SHEET WHITE (9000& 1600 MODEL ONLY)	1	EA			
7373	TRANSPORT CHAIN P70 W/SLIP HOOK	1	EA			
	Subtotal of Standard Options				**20,109.00**	
1961	AXL 8K ILO 7K (79" FENDER WELLS) NO CHANGE IN TIRE OR RIM 79" FENDER WELLS	1	EA	1,202.00	1,202.00	* Added
5570	TIRE 215/75R17.5 16PLY RATED XTA	5	EA	318.00	1,590.00	* Added
5305	WHL 17.5" 8H STL	5	EA	244.00	1,220.00	* Added
7942	LANDING GEAR DUAL 2 SPEED DROP LEG ILO STD	1	EA	643.00	643.00	* Added
7404	LIGHT STOP/TURN 2 EXTRA UP HIGH	2	EA	39.00	78.00	* Added
8081	FLOOR .100 TP ILO WOOD (P/FT) (1500 CUSTOMS ONLY)	26	EA	48.00	1,248.00	* Added
7418	VENT GENERATOR LOC BOTTOM OF CS FRONT DOOR FOR VENTILATION COOLING COMPRESSOR AND ANOTHER IN GN SS WALL BEHIND GEN COMP	2	EA	112.00	224.00	* Added
3298	DOOR ACCESS SWING OUT 2" DBL SEALED(32"X 24") MAKE 24" X 24". LOC CS FLUSH!!! W/FLOOR IN REAR PROCESSING AREA FOR CLEAN OUT. LOC BEHIND WHEEL WELL.	1	EA	391.00	391.00	* Added
3460	TO MAKE REAR OF TRAILER SOLID (NO DOOR) WILL HAVE 4' WIDE DOOR	1	EA	0.00	0.00	* Added
3484	DOOR CAMPER 24" HD 2" DBL SEALED DOUBLE DOORS CENTERED IN WALL BETWEEN COOLER AND PROCESSING AREA. NO LIP ON BOTTOM OF DOORS FOR COOLER WASH OUT. EXTRA HEAVY DUTY DOOR FRAMES BECAUSE OF SWINGING MEAT.	2	EA	803.00	1,606.00	* Added
3487	DOOR CAMPER 32" HD 2" DBL SEALED LOC CS, AS CLOSE TO VERTICAL POST BEHIND DROP WALL AS POSSIBLE.	1	EA	858.00	858.00	* Added

Continued...

3495	DOOR CAMPER 48" HD 2" DBL SEALED LOC REAR OF TRAILER 6" OFF CENTER TOWARDS CS OF TRAILER. FULL HEIGHT DOOR. REAR DOOR FRAME MUST BE FLUSH W/FLOOR FOR TRAILER CLEAN OUT. USE EXTRA HEAVY DOOR FRAME BECAUSE OF HEAVY BEEF CARCASSES BEING TAKEN IN & OUT OF DOOR.	1	EA	967.00	967.00	* Added
4514	LOCK DEADBOLT FOR 2" DOOR FOR REAR DOOR	1	EA	67.00	67.00	* Added
6301	DOOR GENERATOR 2" DBL SEALED VENTED SS OF GN	1	EA	534.00	534.00	* Added
8090	EXTRA HEADER REINFORCEMENT LOC SS OF FRONT STORAGE AREA AND GN DUE TO EXTRA WEIGHT OF WATER TANK AND GEN ON SS	1	EA	357.00	357.00	* Added
3011	WALL SOLID PERMANENT-LINED BOTH SIDES 1-3' 9" BEHIND DROP WALL AND 1-14' 11" BEHIND DROP WALL. 11' COOLER (INSIDE DIMENSION) AND 10' 9" PROCESSING AREA.	2	EA	762.00	1,524.00	* Added
2208	LINE WHITE .040 ALUM ZIP SCREWED WALLS OR CEILING P/FT LINE CEILING IN TRAILER INCLUDING GN. OVERLAP SEAMS AND SEAL CEILING IN COOLER AND PROCESSING AREAS.	34	FT	24.00	816.00	* Added
6304	EXPAND TO 8'6"W P/FT X TOTAL TRL LENGTH MAXIMUM WIDTH POSSIBLE. 101" +	34	EA	24.00	816.00	* Added
8030	EXPAND EXTRA HT 6" TOTAL LENGTH OF TRL + GN MAKE 11' 6" TALL	306	EA	20.00	6,120.00	* Added
7479	STN STL SKIN(P/FT OF TRL) BRUSHED STN STL. NOT HIGH GLOSS/SHINE. .048 FOOD GRADE STN STL. EXTRA FOOTAGE ADDED FOR OVERLAP/SEAL. (NOTE: 1 FT OF THIS CODE DOES 2 LINEAR FT). LINE ALL INSIDE WALLS AND DOORS OF COOLER & PROCESSING AREA INCLUDING INSIDE REAR WALL AND INSIDE OF REAR 4' DOOR OF PROCESSING AREA. (INCLUDES 1.5 X FACTOR FOR EXTRA HEIGHT).	60	FT	119.00	7,140.00	* Added
7680	STN STL WORK TOP(P/FT) LOC SS WALL BEHIND SINK. MAKE FOLDING	4	FT	164.00	656.00	* Added
7359	REINFORCE FOR TRL PULLED BY TRUCK OVER 1 TON (STD ON TRAILERS 36' & LONGER)	1	EA	769.00	769.00	* Added
7948	NOSE 6' OPTION ILO STD(32'& UNDER)(8W & 8'6W)	1	EA	103.00	103.00	* Added
7979	6" ADDED TO LENGTH OF GN MAKE 8' ILO 7' 6" LONG	1	EA	196.00	196.00	* Added

Continued...

6217	I-BEAM 14' DOWN CENTER OF ROOF I-BEAM FOR CHAIN HOIST 6" OFF CENTER TOWARDS CS OF REAR PROCESSING AREA CEILING ONLY (MEAT RAIL WILL BE CENTERED IN CEILING AND CONTINUE INTO COOLER).		1	EA	218.00	218.00	* Added
6343	GEN COMPARTMENT LINE & INSULATE SS IN FRONT AREA OF GN FOR DIESEL GEN		1	EA	686.00	686.00	* Added
6361	GEN COMPARTMENT TO MAKE BACK REM		1	EA	129.00	129.00	* Added
8151	TO ADD EXTRA ROOF BOWS EA 12" CENTERS ILO 24"		13	EA	35.00	455.00	* Added
2437	INS 1" BEADBOARD (P/LFT) CEILING AREA FORWARD OF COOLER (INCLUDING GN) AND REAR PROCESSING CEILING.		23	FT	7.00	161.00	* Added
CUSTOM01	HOOKS ON ROLLERS FOR MEAT RAIL EXACT NUMBER/NEEDS TBD???	*	12	EA	43.00	516.00	* Added
CUSTOM02	SUPPORT SYSTEM OFF FLOOR FOR MEAT RAIL SYSTEM IN PROCESSING AREA AND COOLER CROSS SUPPORTS BELOW CEILING LINER TO HAVE ROOM FOR BOLTS & NUTS ABOVE AT DESIGNATED LOC FOR ATTACHING MEAT RAIL BRACKETS AS SPECIFIED IN DETAILED FINAL DRAWING. (NOTE: MEAT RAIL SYSTEM MUST SUPPORT MINIMUM 6000# HANGING WEIGHT).	*	1	EA	3,345.00	3,345.00	* Added
CUSTOM03	DRAIN SUMP 10" X 4" X WIDTH OF TRL FULL WIDTH AT REAR OF TRL BETWEEN I-BEAMS W/2" PIPE THREAD DRAIN FITTINGS ON BOTH ENDS. REMOVEABLE ALUM GRATE FULL WIDTH OF TRAILER FLUSH W/FLOOR ABOVE DRAIN SUMP.	*	1	EA	824.00	824.00	* Added
CUSTOM04	LINE W/.100 UNDER CROSS MEMBERS UNDER COOLER UNDER COOLER	*	12	EA	41.00	492.00	* Added
CUSTOM05	SPRAY FOAM 4" THICK UNDER COOLER FLOOR PER SQ FT	*	96	EA	27.00	2,592.00	* Added
CUSTOM06	INSULATE WALLS CEILING AND DOORS OF COOLER 2" THICK. (1.5 FOOTAGE FACTOR FOR WALLS BECAUSE OF HEIGHT).	*	71	EA	38.00	2,698.00	* Added
CUSTOM08	HEX HEAD SCREWS W/RUBBER GASKETS ILO STD FOR COOLER AND PROCESSING WALLS AND CEILING	*	1	EA	200.00	200.00	* Added
CUSTOM09	MEAT RAIL SYSTEM NOTE: SINGLE RAIL IN PROCESSING AREA BRANCHING TO 4 RAILS IN COOLER. INCLUDES 3 SWITCHES.	*	1	EA	3,464.00	3,464.00	* Added
CUSTOM10	TROLLEY FOR I-BEAM FOR CHAIN HOIST	*	1	EA	185.00	185.00	* Added

Continued...

CUSTOM11	TAPED WALL LINING PER FT ALL COOLER AND PROCESSING AREA WALLS INCLUDING SOLID WALLS.	*	76	EA	8.00	608.00	* Added
CUSTOM12	HOIST 110V 1-TON #42401. MUST BE LOW PROFILE W/CHAIN CAPTURE. POWER CORD MUST BE ON REEL OR MADE TO NOT HANG DOWN IN PROCESSING AREA.	*	1	EA	2,981.00	2,981.00	* Added

Qty	Trailer No.	Description	Revised Length	Revised Width	Revised Height	Price Each	ItemTotal
1	CUSL-0000	CUSTOM INTERIOR	0	0	0	32,996.00	32,996.00

Part No.	Description	Qty	U/M	Price Per	Extended	Action Code
CUSL0000B	CUSTOM LQ BASE	1	EA			
	Subtotal of Standard Options				**0.00**	
2293	SWITCH FOR 110V LIGHT 1-COOLER LTS, 1-PROCESSING LTS, 1-FOR SWITCHED 220V RECEPTACLE LOC AT CS OF REAR DOOR FOR AIR CURTAINS, & 1-BEHIND CS CAMPER DOOR FOR FRONT GN AREA LTS.	4	EA	39.00	156.00	* Added
2270	RECEP 220V SURFACE MOUNT 2.2 AMPS FOR AIR CURTAINS (20V 20AMP RECP?). LOC ON BACK WALL HIGH NEAR CEILING NEXT TO HINGE SIDE OF REAR DOOR FOR AIR CURTAINS. OUTLET TO BE SWITCHED. CUSTOMER TO SUPPLY AND INSTALL AIR CURTAIN IF DESIRED!!!	1	EA	192.00	192.00	* Added
2291	RECEPT DUPLEX GFCI W/WATER COVERS. 1-IN CEILING 5' IN FRONT OF BACK WALL/DOOR AND 3' FROM SIDE WALL, 1-SS WALL OF PROCESSING AREA (1' BEHIND COOLER WALL 4' ABOVE FLOOR), 1-CENTERED CS WALL PROCESSING AREA (4' ABOVE FLOOR FOR MEAT SAW), 1-INSIDE STORAGE AREA CS ABOVE DROP WALL.	4	EA	74.00	296.00	* Added
2182	PROPANE TANK SINGLE 85# MOTOR HOME LOC OUTSIDE ON DROP WALL	1	EA	603.00	603.00	* Added
2378	GEN. DSL. 10.0 KW KOHLER UNINSTLD	1	EA	10,282.00	10,282.00	* Added
2614	GEN. TO INSTALL A 7KW-20KW DIESEL(INCL:50 GAL FUEL TANK,GAUGES,TRANSFER SWITCH,REMOTE START PANEL HARNESS & EXHAUST)	1	EA	2,100.00	2,100.00	* Added
CUSTOM	NOTE: FEATHERLITE INC. DOES NOT GUARANTEE TRAILER TO MEET USDA REQUIREMENTS. THAT IS THE CUSTOMER RESPONSIBILITY.	1	EA	0.00	0.00	* Added

Continued...

CUSTOM01	100AMP POWER SERVICE LOC ON CS OF GN W/BOTTOM OF BOX 2' ABOVE TOP OF DROP WALL	*	1	EA	2,331.00	2,331.00	* Added
CUSTOM02	HEATER HOT WATER DEMAND TYPE #A9240FX. PROPANE W/110V IGNITER.	*	1	EA	2,446.00	2,446.00	* Added
CUSTOM03	TANK PLASTIC WATER 150 GAL LOC SS BEHIND DROP WALL, CUSTOMER MAY NEED TO PROVIDE AND INSTALL ANOTHER 150 GAL TANK ON TOW VEHICLE, FOR PROCESSING LARGE ANIMALS.	*	1	EA	1,278.00	1,278.00	* Added
CUSTOM04	REFRIGERATION UNIT 2 HP 3RRF. COMPRESSOR LOCATED IN GN. REFRIGERATION UNIT LOC HIGH FRONT OF COOLER.	*	1	EA	7,871.00	7,871.00	* Added
CUSTOM05	PUMP WATER 1/4 HP 110V MQ3-45	*	1	EA	1,003.00	1,003.00	* Added
CUSTOM08	LIGHTS COOLER SHATTERPROOF	*	2	EA	303.00	606.00	* Added
CUSTOM09	FLOR LIGHTS WATERPROOF 4-4' DOUBLE TUBE LOC IN PROCESSING CEILING & 1-LOC CEILING BEHIND DROP WALL IN FRONT COMP OF TRL.	*	5	EA	217.00	1,085.00	* Added
CUSTOM10	SINK STAINLESS STL WITH HOSE BIB HOT & COLD WATER. LOC SS IN PROCESSING AREA 2' BEHIND COOLER WALL. SIZE 20" X 20" (#76585?). KNEE OPERATED FAUCET FOR SINK	*	1	EA	2,747.00	2,747.00	* Added

Items Sub Total **101,784.00**

Accepted this _____ **Day of** _____, _____

Signature _____ **Date** _____

Above prices subject to change without notice.

Quoted with Software Version: 1.0.57 Price Book Date: 12/27/2004

Quote Total **101,784.00**