EXHIBIT 20
DATE 2/15/05
HB 674

correct operation of the test methods, exceed the values in the following table in only one case in twenty.

Antiknock Index	Repeatability, Antiknock Index Units	Reproducibility, Antiknock Index Units
83	0.2	0.7
85	0.2	0.7
87	0.2	0.6
89	0.2	0.6
91	0.2	0.6
93	0.2	0.6
95	—	0.6
97	—	0.7

NOTE X1.1—These precision values were calculated from Research and Motor octane number results utilizing exchange sample test data obtained by the ASTM National Exchange Group (NEG), the Institute of Petroleum, or the Institut Français du Petrole, or combination thereof, participating in cooperative testing programs. The precision values for 83, 85, 95, and 97 AKI were obtained from NEG data during the period 1980 through 1982 and have been analyzed in accordance with RR: D02-1007, "Manual on Determining Precision Data for ASTM Methods on Petroleum Products and Lubricants," Spring 1973.[15] The precision values for 87 though 93 AKI were calculated using the data from RR: D02-1383, "Research and Motor Octane Number Precision Study Report, 1988 through 1994," December 1995.[16]

X1.5.2.3 *Bias*—Since knock ratings are determined by the conditions of the empirical test methods involved, bias cannot be determined.

X1.6 Effects of Altitude and Weather on Vehicle Antiknock Requirement

X1.6.1 A vehicle's antiknock requirement can vary with changes in altitude, ambient temperature, and humidity, depending on the control system of the vehicle. New vehicles have sensors to measure, and engine management computers which take into account, such conditions as air charge temperature and barometric pressure. These vehicles are designed to have the same antiknock requirement at all altitudes and a reduced sensitivity to changes in ambient temperature. This more sophisticated control technology began to be used extensively in 1984. This technology, while constantly evolving and improving, is used on almost all new vehicles. This means that many vehicles in today's fleet require fuel having the same antiknock index regardless of changes in altitude or ambient temperatures. Older vehicles which do not have sophisticated control systems will likely experience changes in antiknock requirement due to changes in altitude and weather conditions. However, the changes in antiknock requirement indicated in the following sections apply to a continually smaller part of the vehicle fleet.

X1.6.2 The antiknock requirement of an older vehicle decreases as altitude increases, primarily due to reduction in mixture density caused by reduced atmospheric pressure. The change in antiknock requirement for altitude for older vehicles is given in Fig. X1.2. Boundaries of the areas defined and the

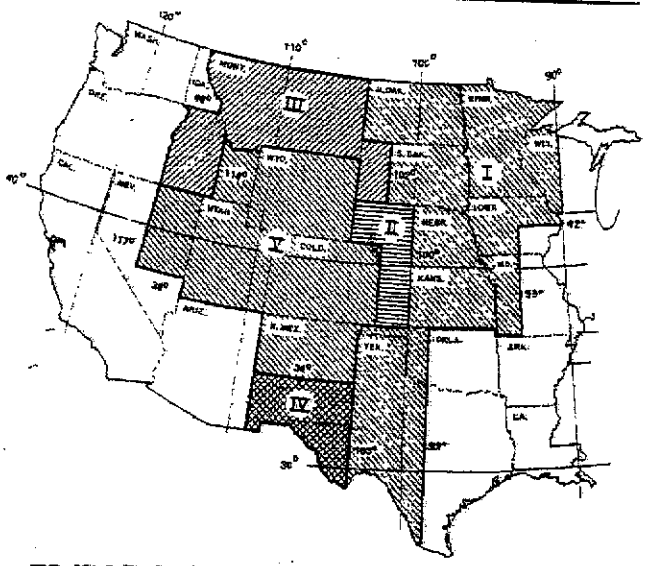

FIG. X1.2 Reduction in Vehicle Antiknock Requirements for Altitude[A,B]

Area	Less than 89 AKI	89 AKI or Greater[A,B]
I	0.7	0.5
II	1.5	1.5
III	2.2	1.5
IV	3.0	2.0
V	4.5	3.0

[A] Fuel may be marketed using these reductions, but actual antiknock index minimums must be posted.

[B] While the reductions in this table apply to most pre-1984 vehicles, the control technology on almost all new vehicles will cause them to have no reduction in antiknock requirement at higher altitudes.

corresponding antiknock index reductions were established to protect vehicles driven from a higher altitude to a lower altitude (and, hence higher antiknock requirement) area while using a fuel obtained in the high altitude area.

X1.6.3 Tests by CRC and other organizations have shown that the decrease in antiknock requirements with altitude is larger for most models between 1971 and 1984, designed to use a fuel with an antiknock index of 87, than for pre-1971 vehicles. Generally the pre-1971 vehicles have high compression ratios and were designed for fuels with an antiknock index of 88 or higher. Fuels with antiknock indexes below 89 are adjusted by a larger factor than those with an antiknock index of 89 or greater.

X1.6.4 The antiknock requirements of older vehicles rise with increasing ambient temperature on the average by 0.097 MON per degree Celsius (0.054 MON per degree Fahrenheit).

X1.6.5 The antiknock requirements of both older and new vehicles decrease with increasing specific humidity by 0.245 MON per gram of water per kilogram of dry air (0.035 MON per grain of water per pound of dry air).

X1.6.6 Because temperature and humidity of geographical areas are predictable throughout the year from past weather records, antiknock index levels can be adjusted to match seasonal changes in vehicle antiknock requirements. Fig. X1.3 defines the boundaries of areas and the typical reduction in

[15] Supporting data have been filed at ASTM International Headquarters and may be obtained by requesting Research Report RR: D02–1007.

[16] Supporting data have been filed at ASTM International Headquarters and may be obtained by requesting Research Report RR: D02–1383.